



GE-IPS200G16TB

16 Bay IP SAN Storage



Features

- High-performance, High-capacity
- Max. 0.0Mbps recording rate
- Max. 16 HDDs up to 16TB storage
- High reliability
- Embedded Linux
- RAID 10/7/0/1/0, RAID X
- HDD hot spare
- Redundant Power Supply
- HDD hot-swap
- Ethernet trunk
- Multiple units management
- Alarm management
- Modular architecture


Specifications

Capacity		GE-IPS200G16TB
Disk Interface	SATA: 1TB, 2TB, 3TB, 4TB, 5TB	
RAID	RAID-1,0,7,10, RAID X	
HDD Hot-swap	Supported	
Max. Internal HDDs	16 x 3.5" HDD Max. 16TB (up to 1TB/each)	
Storage Management		
Recording rate	0.0Mbps	
Disk management	S.M.A.R.T. (Self-Monitoring, Analysis and Reporting)	
Device Management		
Management	Web-based GUI, Multiple units management	
Alarm	Sound, LED, Email, GUI Warning	
Network / Interfaces		
Network Protocols	TCP/IP, UDP, HTTP, FTP, IPv6, iSCSI, NAS, NRU	
Trunk	Supported	
Ethernet	2 x Gigabit network port, RJ45 interface	
Output	VGA output for debugging	
USB	2 x USB2.0 for keyboard or user data backup	
General		
Operating Temperature	10°C ~ 35°C / 50°F ~ 95°F	
Operating Humidity	10% ~ 90%	
Power	100 ~ 240V AC, 50 ~ 60Hz Redundant Power Supply	
Power Consumption	Max. 115W (HDD not included)	
Weight	Approx. 2.5kg (HDD not included, redundant power supply)	
Dimensions	156 x 483 x 500mm / 6.14" x 19.02" x 19.69"	

Dimension (unit:mm)

Weight

2.5 KG (without HDD)

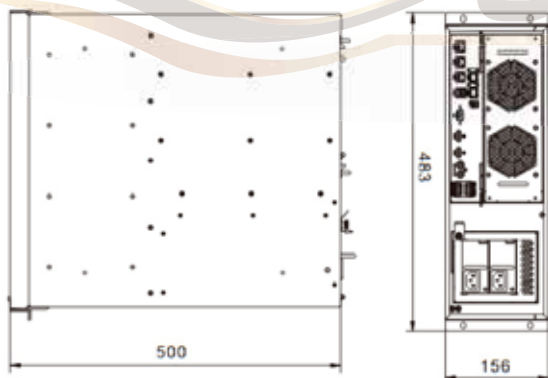

(*) Design and specifications are subject to change for product improvements without prior notice.

